

# PY32F003(TSSOP20)-Start Kit

## User Guide



**Puya Semiconductor (Shanghai) Co., Ltd**

## Contents

1.	Introduction .....	3
2.	Functional pin assignment.....	3
3.	Getting Started Guide.....	3
4.	Overview of Hardware Design .....	3
4.1	Power supply .....	3
4.2	Boot Mode Selection .....	4
4.3	LED indicator light.....	4
4.4	Keys .....	5
5.	Guide to Using the Example .....	5
5.1	GPIO Toggle.....	5
5.1.1	Purpose of the Example .....	5
5.1.2	Execution Results .....	5
6.	Schematic .....	6
7.	Updated History .....	7

## 1. Introduction

The development board uses the PY32F003 as the main controller. The board provides a simple hardware development environment for the Puya chip with 32 bits ARM® Cortex®-M0+ CPU core. The board uses the mini-USB interface for power supply. Peripheral resources such as SWD, Reset, Boot, User button key, Reset key, LED, etc. are provided, including expansion pins. This document provides detailed hardware schematics and guidelines for using the associated applications.

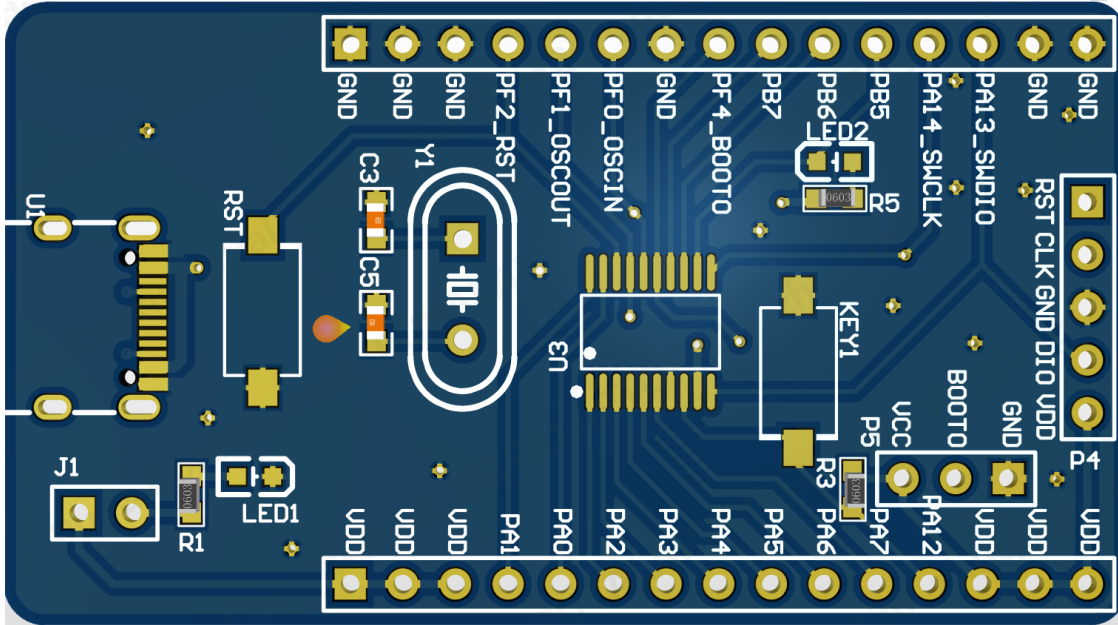


Figure 1-1 PY32F003 Start Kit

## 2. Functional pin assignment

Table 2-1 Pin Assignment

Function	Pin	Description	Note
LED	\	LED1	Power LED
	PB5	LED2	LED
KEY	PA12	SW1	User Key
	PF2	SW3	Reset Key

## 3. Getting Started Guide

The development board uses a mini-USB to LDO to provide 3.3V power. In order to download the program to the development board, a mini-USB cable is required. We need to select the correct boot mode and connect the USB cable, if LED1 is lit, the power supply is connected in the correct way. The routines are provided for the Keil version only.

## 4. Overview of Hardware Design

### 4.1 Power supply

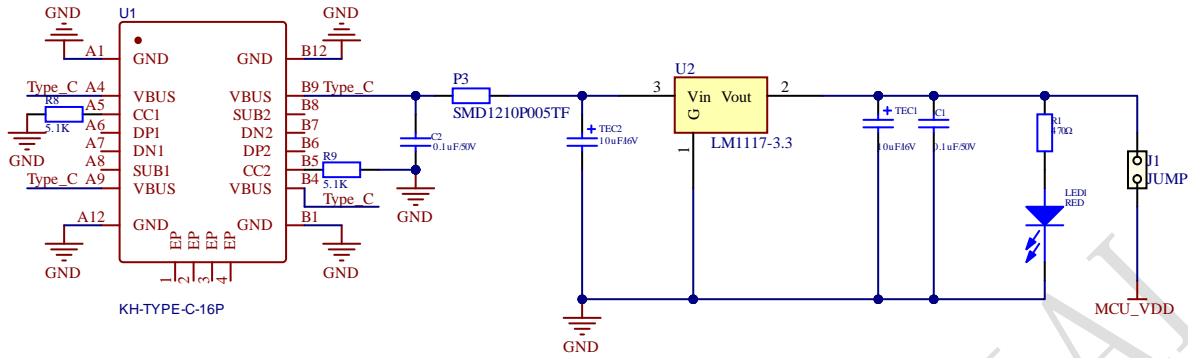


Figure 4-1 Power supply schematic

## 4.2 Boot Mode Selection

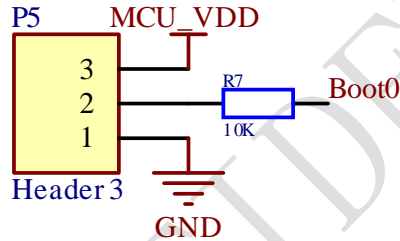


Figure 4-2 Boot mode selection schematic

With the BOOT0 pin and the boot configuration bit nBOOT1 (stored in the Option bytes), three different boot modes can be selected, as shown in the following table.

Table 4-1 Boot mode configuration

nBOOT1 bit	BOOT0 pin	Boot Mode
X	0	Select Main flash as the boot area
1	1	Select System memory as the boot area
0	1	Select SRAM memory as the boot area

## 4.3 LED indicator light




Figure 4-3 LED Functional schematic

## 4.4 Keys

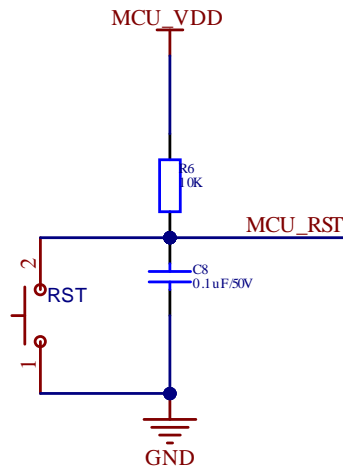


Figure 4-4 Reset key function schematic

## 5. Guide to Using the Example

### 5.1 GPIO Toggle

#### 5.1.1 Purpose of the Example

This sample program includes the following functions of the MCU:

- Learn to control LEDs using GPIOs
- Learn to use SysTick to generate time delays


There is one LED on the development board, the LED is controlled by GPIO. This sample program will tell how to light up the LED.

#### 5.1.2 Execution Results


Download the program <GPIO\_Toggle> to the development board and you will see the LED blinking.

## 6. Schematic


### Power

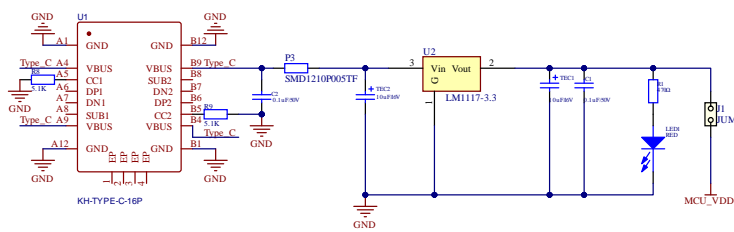


### Extension Pin

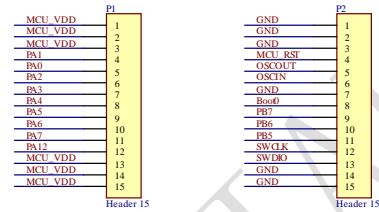

### Key




### Mcu




### LED




### Boot



### Reset



### Debug



### OSC



## 7. Updated History

Version	Content	Date
V1.0	Initial version	2022/04/12
V1.1	Updated the picture	2024/05/16



Puya Semiconductor Co., Ltd.

### IMPORTANT NOTICE

Puya Semiconductor reserves the right to make changes without further notice to any products or specifications herein. Puya Semiconductor does not assume any responsibility for use of any its products for any particular purpose, nor does Puya Semiconductor assume any liability arising out of the application or use of any its products or circuits. Puya Semiconductor does not convey any license under its patent rights or other rights nor the rights of others.